



RUBBERCOMP RUBBER COATING



RUBBERcomp® Synthetic Rubber Coating. RUBBERcomp® is a multi-purpose, air drying specialty rubber coating. It can be easily applied by dipping, brushing, or spraying. It protects coated items against moisture, acids, abrasion, corrosion, and skidding/slipping, and provides a comfortable, controlled grip.

RUBBERcomp remains flexible and stretchy over time, and will not crack or become brittle in extreme weather conditions. We recommend applying at least 4 layers.

It has been tested and proven in temperatures from -30°C to 90°C.

BINDER: Rubber

DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units
satin 35-50 gloss units
gloss 80-100 gloss units

HEAT RESISTANCE: 90°C


STORAGE STABILITY: 60 months

SIZE: 1l



SALES QTY:

1l: 2 pcs

MATERIAL

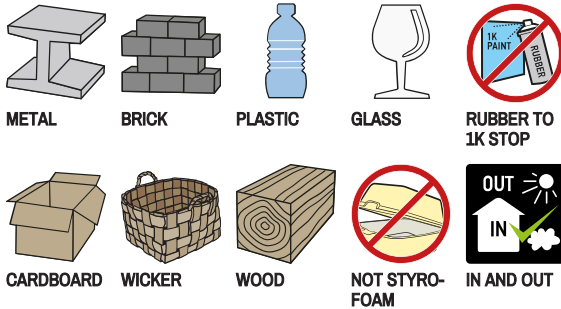

HARDNESS



SOLVENT BASED RUBBER
SOLVENT BASED

MASTON Rubbercomp rubber coating

| Art. No. | MASTON Rubbercomp rubber coating | Color | Barcode |
|----------|----------------------------------|-------|---------------|
| 1911215 | RUBBERcomp Black semi gloss 1L | ● | 6412490027599 |
| 1912220 | RUBBERcomp White 1L | ○ | 6412490027605 |